


911 SIGNAL[®]



NIGHTWING


DIMENSIONS

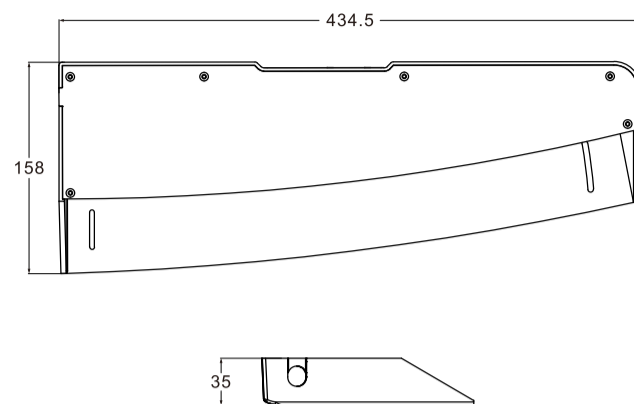

TECHNICAL SPECIFICATIONS


Item	052101	052102
Color	Dual	Single
Voltage	10-33VDC	
Max Power	36W	
LED	60pcs 3W	30pcs 3W
LENS	Reflex	
Flash Patterns	57	
Mount	Bracket Mount	
Operating Temperature	-30 to 70°C	

INTEGRATED BUTTONS

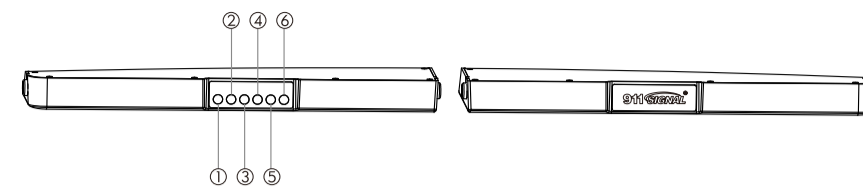


- 1 Flash One**
With the button on, press BUTTON 5 to change flash patterns.
- 2 Flash Two**
With the button on, press BUTTON 5 to change flash patterns.
- 3 50% Power**
- 4 Flood Light**
- 5 Flash Pattern**
- 6 Take Down**
With the button on, press BUTTON 5 to change the position of the TD lights.

WIRING

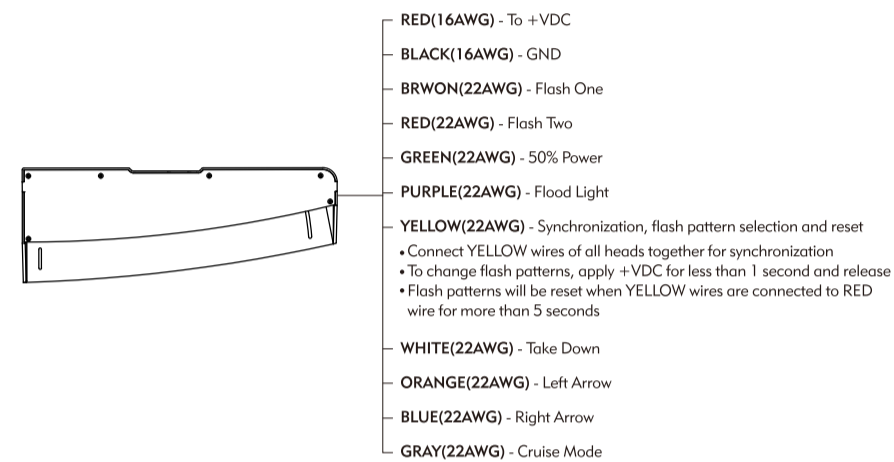


- OVERRIDE SEQUENCE**
- Flood Light overrides Flash One.
 - Flash One overrides Flash Two.

MOUNT

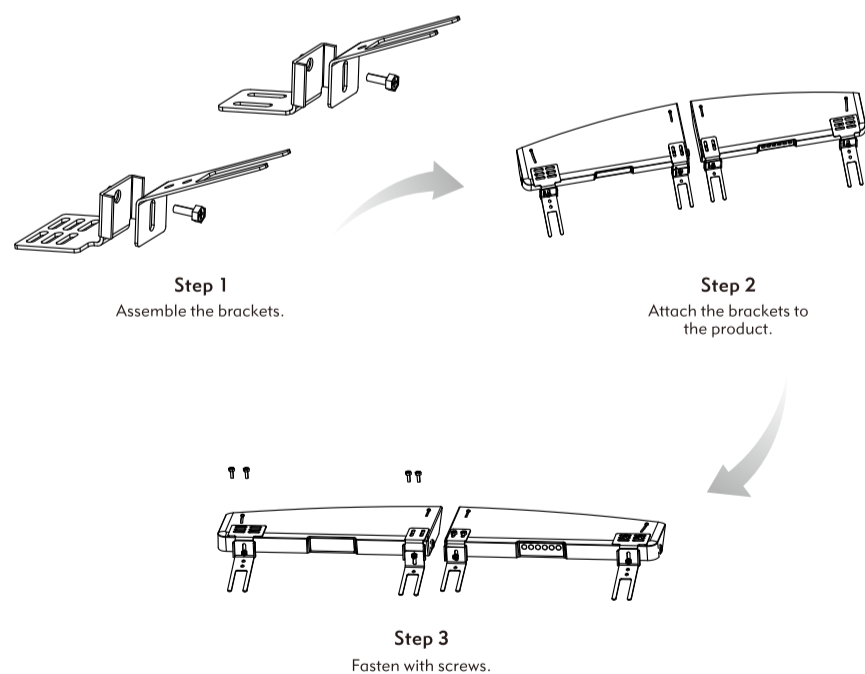

Adjustable glare shield

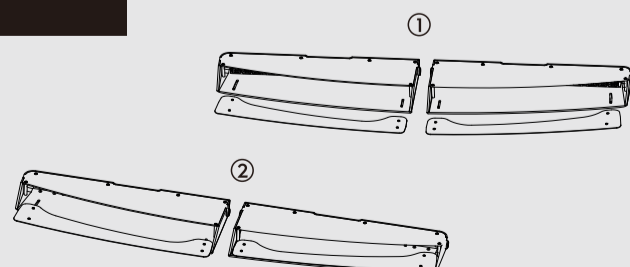

FLASH PATTERNS

Color 1		Color 1 + Color 2		Color 2	
1	Cluster	20	Cluster	39	Cluster
2	Cycle	21	Cycle	40	Cycle
3	Whirl	22	Whirl	41	Whirl
4	Steady-Double	23	Steady-Double	42	Steady-Double
5	Single 120 All	24	Single 120 All	43	Single 120 All
6	Double 120 All	25	Double 120 All	44	Double 120 All
7	Single 240 All	26	Single 240 All	45	Single 240 All
8	Single 120 L/R	27	Single 120 L/R	46	Single 120 L/R
9	Double 120 L/R	28	Double 120 L/R	47	Double 120 L/R
10	Single 240 L/R	29	Single 240 L/R	48	Single 240 L/R
11	Single 120 Split 1	30	Single 120 Split 1	49	Single 120 Split 1
12	Single 240 Split 1	31	Single 240 Split 1	50	Single 240 Split 1
13	Single 120 Split 2	32	Single 120 Split 2	51	Single 120 Split 2
14	Single 240 Split 2	33	Single 240 Split 2	52	Single 240 Split 2
15	Single 120 In/Out	34	Single 120 In/Out	53	Single 120 In/Out
16	Single 240 In/Out	35	Single 240 In/Out	54	Single 240 In/Out
17	Combo Single 120	36	Combo Single 120	55	Combo Single 120
18	Combo Single 240	37	Combo Single 240	56	Combo Single 240
19	Combo Single 120/240	38	Combo Single 120/240	57	Combo Single 120/240

911 Signal Technology Inc.

Add:Room 701-702,Hengwei Building,No.258, Tiangao Lane, Shouan Subdistrict,Yinzhou Area,Ningbo City, Zhejiang,China.

Tel: +86 574 89017911 +86 400 6757911
 Fax: +86 574 82822560
 Email: sales@911signal.com
 Website: www.911signal.com